
## **Tornado Boat Example** 12.5m High Performance RIB





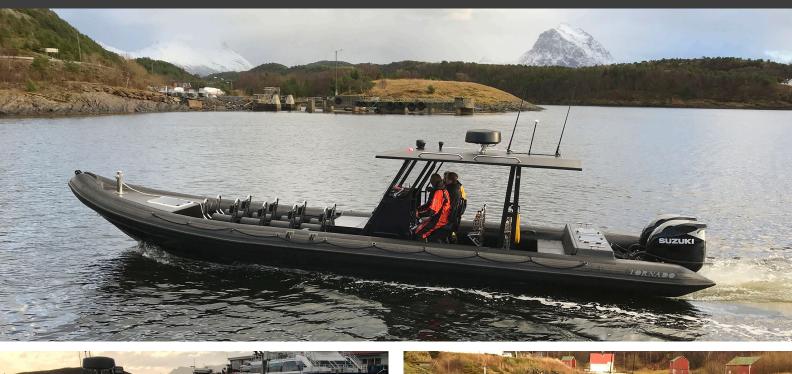

## Technical specifications:

12300 mm (40,4ft)
3150 mm (10,4ft)
520 mm (20inch)
7 (each fitted with overpressure valves)
Fibre glass reinforced epoxy vinylester.
SCRIMP type vacuum resin infusion.
100% polyurethane (TPU).
1 x 300 litre (80gal) installed in console.
Build for twin engines: 2 x XL (635mm/25") legs.
Black
Black

T T T R R B F G B E : T T T T T T T T T T C R R R	eavy duty fabric option ube Top Wear Panels incl. bow iple Strake option ubber handles ternal life-lines worler fairlead & guide oredeck storage locker w. Vetus hatches womoring Post dension Bracket ansom Storage Locker w. Vetus hatches ansom Storage Locker w. Vetus hatches attemption of the storage ha
---	--

All tecnical specifications are for the actual boat. Other boats sharing the same basic hull may have different specifications. This paper only shows an example of how this boat model can be configured. Since all Tornado boats are build to requests from each individual customer anything (almost) can be changed.

